



International Journal of Engineering and Science Invention

e-ISSN : 2319-6734

p-ISSN : 2319-6726

Contents :

- | | |
|--|--------------|
| A Review of the Emerging Research Issues in the Internet of Things Low Power Networks (IoT-LPNets) | 01-11 |
| Badamasi Ja'afaru, Sama'ila Bello, Muhammad Mahmud Yahya, Aminu Haruna Rawayau, Jamilu Yusuf | |
| Determination of Watermelon Mosaic Virus (Wmv-2) By Serological Methods and Biological Index Studies in Some Cucurbits in UŞAK | 12-15 |
| Selvihan DIKICI, Gulcan TARLA | |
| Comparative Study Of Coal Mixing Using Chevron Stockpile And Windrow Stockpile Methods In Pt. Anugerah Bara Kaltim Kecamatan Loa Janan District Kutai Kartanegara Provinsi Kalimantan Timur, Indonesien | 16-22 |
| sakdillah, Windhu Nugroho | |
| Derivation and Solution of Space-Time Fractional Reaction-Convection-Diffusion Equation in Comb-Like Model | 23-27 |
| sraa M. Abdelsabour, Mohammed Sallah ¹ , Mohsen A. Zahran, Ahmed Elgarayhi | |
| Emergency Response Time in Multiple Patrol Dispatching | 28-33 |
| Javier Holguín de la Cruz | |
| Gender Mainstreaming in the Coverage of Health in Urban Newspapers: An Analysis of Reality in India and Malaysia | 34-43 |
| Jolly Jose PhD, Sharon Wilson PhD, Thresia Haldane | |
| Snap-through Buckling Analysis of FGM Shallow Spherical Shells due to Temperature Variations | 44-50 |
| R. H. Cao, G. H. Nie | |
| A multilevel fuzzy assessment of solar energy project risks using Matlab-Simulink | 51-63 |
| Dr Li HongXia, Bouba Oumarou Aboubakar | |

IJESI

Volume 9, Issue 12, Ser.-2, December - 2020

Comparative Study Of Coal Mixing Using Chevron Stockpile And Windrow Stockpile Methods In Pt. Anugerah Bara Kaltim Kecamatan Loa Janan District Kutai Kartanegara Provinsi Kalimantan Timur, Indonesien.

Sakdillah*, Windhu Nugroho.**

Mining Engineering Faculty of Engineering, Mulawarman University

Jl. Sambaliung No.9, Sempaja Selatan, Samarinda City Post Code 75119, East Kalimantan, Indonesien.

Abstract: Coal is still used in various industries with certain specifications, such as caloric value, ash content, sulfur content (Total Sulfur), flying substances (Volatile Matter) and water content (Total Moisture). Because the availability of coal with a variety of qualities is certainly not possible to meet the specification criteria that can be used by industry. Therefore we need a coal mixing system that can provide the quality desired by the industry or Market. In mixing coal there are several methods which are carried out and have different homogeneity. Coal blending using the chevron stockpile method and the windrow stockpile method were tested 5 times. Then the preparation of process was carried out using method of proximate analysis was carried out on the coal. The analysis results were then processed using the excel application. In the chevron stockpile method, the fluctuation value of coal quality analysis was as follows: total moisture had a range of 10.90, inherent moisture had a range of 14.58, ash content had a range of 39.76, volatite matter had a range of 4.71, fixed carbon had a range of 10.14, total sulfur had a range of 72.72 and calorie value had a range of 5.15. In the windrow stockpile method, coal quality fluctuation values were as follows: total moisture had a range of 6.84, inherent moisture had a range of 8.6, ash content had a range of 22.28, volatite matter had a range of 4.24, fixed carbon had a range of 8.18, total sulfur had a range of 31.82 and calorie value had a range of 1.61.

Keywords: coal mixing, chevron stockpile method, windrow stockpile method, coal preparation, coal analysis, coal quality

Date of Submission: 15-12-2020

Date of Acceptance: 30-12-2020

I. INTRODUCTION

Coal is a very complex mixture of organic chemicals that contain carbon, oxygen and hydrogen in a carbon chain. Coal comes from plants that have died and are buried in a basin filled with water for a very long time, around millions of years to thousands of years. Coal is also one of the types and fuels for energy generation and is one alternative energy source that is currently increasing rapidly in the world market as an abundant and economical source of energy.

The increasing demand for coal in the world, makes Indonesia exploit this fuel on a large scale. Its greater availability and lower price compared to petroleum makes coal more economical when used in industry.

In its development, coal has now become one of the largest regional revenue contributors for the East Kalimantan region, one of which is a company that has contributed to the revenue, namely PT. Anugerah Bara Kaltim. Coal is still used in various industries with certain specifications, such as caloric value, ash content, sulfur content (Total Sulfur), flying substances (Volatile Matter) and water content (Total Moisture).

Because the availability of coal with a variety of qualities is certainly not possible to meet the specification criteria that can be used by industry. Therefore we need a coal mixing system that can provide the quality desired by the industry.

In mixing coal there are several methods of accumulation which are carried out and have different homogeneity. Therefore this research was conducted in order to find out the comparison of the level of homogeneity between methods.

II. RESEARCH METHODOLOGY

Data Collection Techniques.

This research was conducted in the area of the Coal Handling Facility (CHF) at PT. Anugerah Bara Kaltim. Some things that become a reference in taking data in this thesis include:

1. Taking Coal for Mixing Coal

Sampling is taking a small portion of material from a large pile of material to represent the overall quality of the large material. Sampling is done in ROM Stockpile.

2. Coal Blending

The method for mixing various kinds of coal and the mixing method used in this study were the chevron stockpile method and the windrow stockpile method.

3. Sampling for Analysis

This sample is taken after mixing the mixed coal and this sampling is done randomly

4. Coal Sample Preparation

Preparation is a process of working the sample before it is analyzed by making the size and condition of the sample ready for analysis, the stages of which include drying if the coal is wet, reducing the size of the sample, mixing and reducing the weight of the sample by dividing it into two parts.

5. Analysis of Coal Quality

Analyzing the quality of mixing coal from samples that have been mixed with the chevron stockpile and windrow stockpile methods by conducting laboratory tests consisting of inherent moisture, total moisture, ash content, total sulfur, volatile matter, and caloric value (adb). This research was conducted to determine differences in the accuracy of coal mixing using the chevron stockpile method and the windrow stockpile method. The data that has been obtained will then be processed and discussed to determine the differences in the quality parameters of the results of mixing coal and the processed data is presented using Microsoft Excel software.

ANALYSIS.

Table 1 Analysis Results

NO	Variaty	Sample Code	% TM (ar)	% TM (adb)	Ash % (adb)	VM % (adb)	% FC (adb)	TS % (adb)	Gross Calorific Value (cal/gr)
EXPERIMENT 1									
1	Raw Coal	LJ B	24. 46	20. 69	2.6 5	37. 89	38. 77	0.2 8	5,327
		LJ D	33. 42	26. 85	5.9 8	34. 73	32. 44	0.1 6	4,499
	Plan	Bl en d Pla n	28. 94	23. 77	4.3 2	36. 31	35. 61	0.2 2	4,913
		Anal isis	Ch evr on	29. 56	21. 46	5.7 2	38. 10	34. 72	0.4 1
	Wi nd ro w		29. 62	24. 78	4.9 5	36. 64	33. 63	0.2 6	4,938
	EXPERIMENT 2								
2	Raw Coal	LJ B	25. 22	20. 37	3.4 9	37. 80	38. 34	0.2 8	5,253
		LJ D	29. 76	26. 05	5.0 8	35. 78	33. 09	0.1 4	4,663
	Plan	Bl en d Pla n	27. 49	23. 21	4.2 9	36. 79	35. 72	0.2 1	4,958
		Anal isis	Ch evr on	28. 83	21. 52	5.3 7	38. 24	34. 87	0.3 2
	Wi nd ro w		28. 36	24. 35	4.2 9	37. 10	34. 26	0.2 0	4,973

		ro							
		w							
EXPERIMENT 3									
3	Raw Coal	LJ B	24.13	21.19	3.02	37.15	38.64	0.30	5,283
		LJ D	33.87	29.74	4.70	37.05	28.51	0.16	4,393
	Analysis	Blend Plan	29.00	25.47	3.86	37.10	33.58	0.23	4,838
		Chevron	29.48	22.90	5.82	37.18	34.10	0.36	4,952
	Windrow	28.92	24.53	4.72	36.29	34.46	0.24	4,816	
EXPERIMENT4									
4	Raw Coal	LJ B	24.57	20.58	2.89	37.55	38.98	0.29	5,343
		LJ D	32.72	26.51	4.80	35.42	33.27	0.14	4,611
	Analysis	Blend Plan	28.65	23.55	3.85	36.49	36.13	0.22	4,977
		Chevron	29.04	24.42	4.95	37.50	33.13	0.25	4,838
	Windrow	28.79	23.79	4.38	37.24	34.59	0.19	4,932	
EXPERIMENT 5									
5	Raw Coal	LJ B	25.46	21.37	4.75	37.42	36.46	0.31	5,116
		LJ D	33.27	28.47	5.22	39.69	26.62	0.14	4,414
	Analysis	Blend Plan	29.37	24.92	4.99	38.56	31.54	0.23	4,765
		Chevron	27.60	26.04	5.54	39.59	28.83	0.32	4,662
	Windrow	28.29	25.76	4.99	39.34	29.91	0.24	4,799	
Average									
6	Analysis	Blend Plan	28.69	24.18	4.26	37.05	34.51	0.22	4890
		Chevron	28.90	23.27	5.48	38.12	33.13	0.33	4846
	Windrow	28.80	24.64	4.67	37.32	33.37	0.23	4892	

In the above table, the analysis results were obtained to determine the comparison of the homogeneity of the chevron stockpile method with the windrow stockpile.

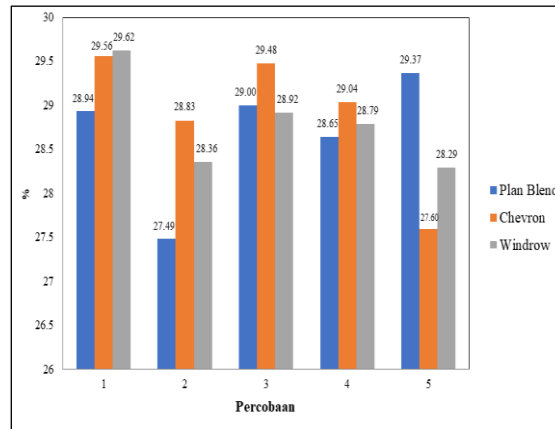


Figure 1 Total Moisture

In the table above, it was found that the total moisture value with a higher homogeneity level was found in the windrow stockpile method, which clearly shows that the value is very close to the desired target.

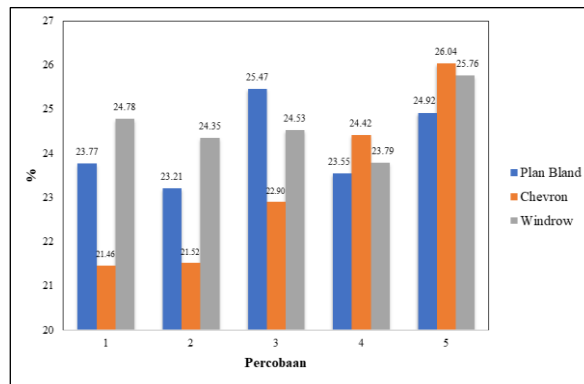


Figure 3 Ash Content Graph

In the ash content value, the homogeneous level was higher in the windrow stockpile method which has a value closer to the target.

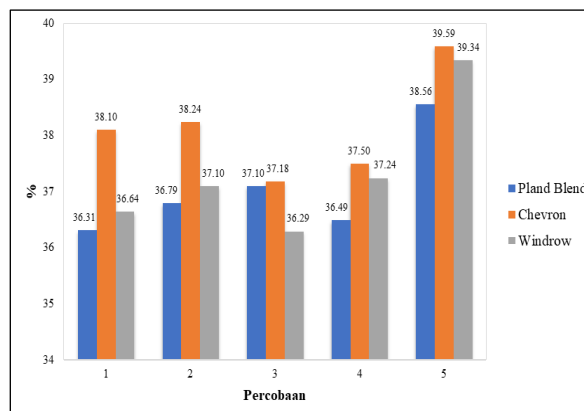


Figure 4 Volatile Matter Graph

for the value of volatile metter the level of homogeneity was higher in the windrow stockpile method with a value approaching the target in all experiments.

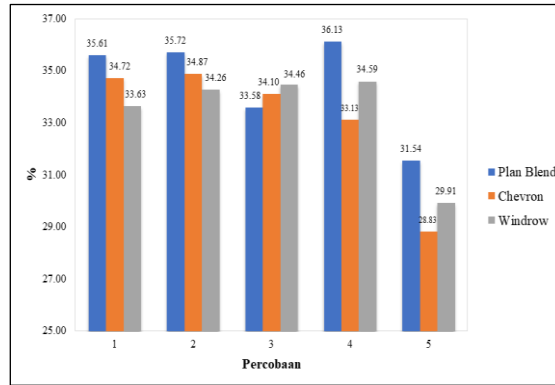


Figure 5 Fixed Carbon Graph

The highest homogeneous level of fixed carbon value in the chevron stockpile method with a ratio of 3: 2 with the windrow stockpile method.

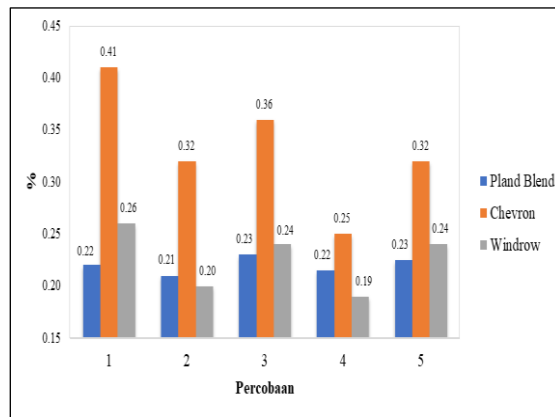


Figure 6 Total Sulfur Graph

In the total value of sulfur the level of homogeneity was found in the windrow stockpile method with a value that approaches the target.

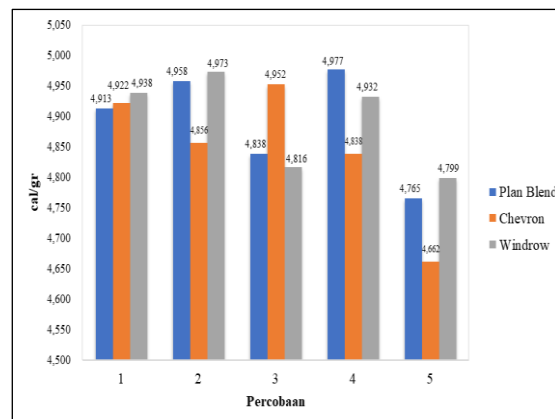


Figure 7 calorific Value Graph

The highest level of calorific value of homogeneity was found in the windrow stockpile method with the value approaching the target more than the chevron stockpile method. With this it can be proven that the windrow stockpile method had a higher homogeneity compared to the chevron stockpile method, although the fixed carbon value was closer to the chevron stockpile method. This happens because in the first experiment, the second experiment and the third experiment the chevron stockpile method had inherent moisture, ash content and volatiles matter values higher or lower than the value of the windrow stockpile method.

Error Factors in Research

Based on my research, there were factors that cause imperfections in this research, namely the treatment of sampling that will be used in analyzing my research. In this study I conducted vertical sampling using a shovel and should have taken horizontal sampling using a pipe to match the rules of taking at the stockpile using a drill tool. Due to the limited use of sampling tools in the company, this study uses a shovel tool that did not use pipes and horizontal sampling was more difficult to use a shovel than a pipe.

III. CONCLUSION

1. The process of coal mixing is done by 2 methods, namely the chevron stockpile method and the windrow stockpile method.

a. In the chevron stockpile method the coal piling process is in the first stage with LJB quality with a weight of ± 30 kg, then in the second stage LJD quality coal weighing ± 30 kg is stacked on top of the first pile, after that it is piled back with LJB quality with a weight of ± 30 kg for the third and fourth stages are stacked on top of the third stack with LJD quality with a weight of ± 30 kg to form a pyramid.

b. In the windrow stockpile method, the process of coal stacking in the first stage is by stacking 3 adjacent piles of coal with a quality of LJB weighing ± 10 kg, then the second stage between the LJB stacks is stacked with coal quality LJD weighing ± 20 kg, after that the third stage is stacked back at on the LJD pile, LJB quality coal weighing ± 10 kg, and in the fourth stage there is a stacking of LJB piles with LJD quality coal pile of ± 20 kg, and the last stage is the LJB quality coal stacking ± 10 kg as much as above the LJD pile thus forming a pyramid.

2. Differences in the quality of mixing coal with the chevron stockpile method and the windrow stockpile method in 5 trials include:

a. Chevron Stockpile Method

- i. Total moisture has a range of 10.90
- ii. Inherent moisture has a range of 14.58
- iii. Ash content has a range of 39.76
- iv. Volatile matter has a range of 4.71
- v. Fixed carbon has a range of 10.14
- vi. Total sulfur has a range of 72.72
- vii. Calorie value has a range of 5.15

b. Windrow stockpile method

- i. Total moisture has a range of 6.84
- ii. Inherent moisture has a range of 8.6
- iii. Ash content has a range of 22.28
- iv. Volatile matter has a range of 4.24
- v. Fixed carbon has a range of 8.18
- vi. Total sulfur has a range of 31.82
- vii. Calorie value has a range of 1.61

3. Based on my research, there are factors that cause imperfections in this research, namely in the treatment of sampling that will be used in analyzing my research. In this study I conducted vertical sampling using a shovel and should have taken horizontal sampling using a pipe to match the rules of taking at the stockpile using a drill tool. Due to the limited use of sampling tools in the company, this study uses a shovel tool that does not use pipes and horizontal sampling is more difficult to use a shovel than a pipe.

IV. SUGGESTION

We recommend that you install the combustion wire more carefully so that there is no miss fire and the installation of the bomb calorimeter must be tight because an explosion can occur during the analysis process. And this is very important. You have to really for attention.

BIBLIOGRAPHY

- [1]. Sample Calculation, Paper presented at the Coal Preparation and Washing Lecture, November 15, Samarinda, Indonesia, 2017.
- [2]. Arif, Irwandy, Indonesian Coal, Gramedia Main Library: Jakarta, Indonesia, 2014.
- [3]. Boediono, et al, Theory and Application and Probability, PT Remaja Rosdakarya: Bandung, Indonesia, .., 2008.
- [4]. Muchjidin, Quality Control in the Coal Industry, Bandung: ITB Publisher, Indonesia, 2006.
- [5]. Riduwan, Fundamentals of Statistics, Alfabeta, Bandung, Indonesia, 2003.

- [6]. Speight, J. G., Handbook of Coal Analysis. United States of America, 2005.
- [7]. Sudarsono, Arief, Introduction to Preparation and Utilization, Bandung, Bandung Institute of Technology (ITB), Indonesia, 2013.
- [8]. Sukandarrumidi, Coal and Peat, Gajah Mada University Press, Jogjakarta, Indonesia, 2013.
- [9]. Sukandarrumidi,, Coal and Its Utilization. Gajah Mada University, Pess Yogyakarta. Indonesia, 2013.
- [10]. Supardi. Statistics Application in Research, A More Comprehensive Statistics Concept, PT. Prima Ufuk Universe, Bandung Institute of Technology(ITB), Indonesia, 2013.

Sakdillah, et. al. " Comparative Study Of Coal Mixing Using Chevron Stockpile And Windrow Stockpile Methods In Pt. Anugerah Bara Kaltim Kecamatan Loa Janan District Kutai Kartanegara Provinsi Kalimantan Timur, Indonesien." *International Journal of Engineering Science Invention (IJESI)*, Vol. 09(12), 2020, PP 16-22. Journal DOI- 10.35629/6734

International Editorial Board

- ❖ Dr. Moinuddin Sarker
Natural State Research, Inc., USA
- ❖ Dr. ahmed nabih zaki rashed
Dr. in MENOUFIA UNIVERSITY, Egypt
- ❖ Dr. Lalan Kumar
Central Institute of Mining and Fuel Research (CIMFR), Dhanbad, India
- ❖ Dr. Nadhir Al-Ansari
Lulea University of Technology, Sweden
- ❖ Dr. Kolo, Stephen Sunday
FUT, Minna, Niger State, Nigeria
- ❖ Dr. Siddalingeshwara K. G
Gulbarga University, India
- ❖ Dr. M. Rizwan
Delhi Technological University (Formaly Delhi College of Engineering), India
- ❖ Dr. Vuda Sreenivasarao
Defence University college, Deberzeit, ETHIOPIA
- ❖ Dr. Abdul Mutalib Leman
Universiti Tun Hussein Onn, Malaysia
- ❖ Dr. Salawu .O.W
Federal University of Agriculture Makurdi , Benue State, Nigeria
- ❖ Prof. Dr. GYV Victor
AMET Maritime University, India

Address: EHTP, National Highway
8, Block A, Sector 34, Gurugram,
Haryana 122001
Email: ijesi@invmails.com
Website: www.ijesi.org

