

PAPER • OPEN ACCESS

## Synthesis of N-oleyl O-sulfate chitosan from methyl oleate with O-sulfate chitosan as edible film material

To cite this article: Daniel *et al* 2018 *IOP Conf. Ser.: Earth Environ. Sci.* **144** 012038

View the [article online](#) for updates and enhancements.

### Related content

- [EDIBLE FILM FROM POLYBLEND OF GINGER STARCH, CHITOSAN, AND SORBITOL AS PLASTICIZER](#)  
N Sariningsih, Y P Putra, W P Pamungkas et al.
- [Electron Spin Resonance Studies of Cu<sup>2+</sup> Doped Ammonium Sulfate Single Crystals](#)  
Kiyoshi Matsuji, Keiichi Ohno and Junkichi Sohma
- [Effect of sulfonation and diethanolamine addition on the mechanical and physicochemical properties of SEPS copolymer](#)  
D Patiño, E Correa and M Acevedo-Morantes



**IOP | ebooks™**

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

# Synthesis of N-oleyl O-sulfate chitosan from methyl oleate with O-sulfate chitosan as edible film material

Daniel<sup>1,\*</sup>, O Sihalo<sup>1</sup>, C Saleh<sup>1</sup> and A R Magdalen<sup>2</sup>

<sup>1</sup>Department of Chemistry, Faculty of Mathematics and Natural Sciences, Mulawarman University, Samarinda, East Kalimantan, Indonesia

<sup>2</sup>Faculty of Medicine, Mulawarman University, Samarinda, East Kalimantan, Indonesia

\*Corresponding author: daniel\_trg08@yahoo.com

**Abstract.** The research on the synthesis of N-oleyl O-sulfate chitosan through sulfonation reaction on chitosan with ammonium sulfate and followed by amidation reaction using methyl oleate has been done. In this study, chitosan was chemically modified into N-oleyl O-sulfate chitosan as an edible film making material. N-oleyl O-sulfate chitosan was synthesized by reaction between methyl oleate and O-sulfate chitosan. Wherein the depleted chitosan of O-sulfate chitosan into O-sulfatechitosan was obtained by reaction of sulfonation between ammonium sulfate and chitosan aldimine. While chitosan aldimine was obtained through reaction between chitosan with acetaldehyde. The structure of N-oleyl O-sulfate chitosan was characterized by FT-IR analysis which showed vibration uptake of C-H  $sp^3$  group, S=O group, and carbonyl group C=O of the ester. The resulting of N-oleyl O-sulfate chitosan yielded a percentage of 93.52%. Hydrophilic-Lipophilic Balance (HLB) test results gave a value of 6.68. In the toxicity test results of N-oleyl O-sulfate chitosan obtained  $LC_{50}$  value of 3738.4732 ppm. In WVTR (Water Vapor Transmission Rate) test results for chitosan film was 407.625 gram/m<sup>2</sup>/24 hours and N-oleylO-sulfate chitosan film was 201.125 gram/m<sup>2</sup>/24 hours.

## 1. Introduction

Edible film is a thin layer serving as a packaging or food coating that can be eaten together with packaged products [1]. Moreover, Sanford and Hutchings (1987)[2] stated that it is not only to extend the shelf life, edible films can also be used as carriers of food components, including vitamins, minerals, antioxidants, antimicrobials, preservatives, and ingredients to improve the taste and color of packaged products. In addition, the materials used to make edible films are relatively inexpensive, easily biologically modified (biodegradable), and simple manufacturing technology. The example of the use of edible films is in wrapping candy, sausage, fruit, and dried soup [3].

Indonesia as a maritime country certainly leaves waste in the form of shrimp shells. The main element of shrimp shells is chitin, a natural polysaccharide that has many uses such as chelating, emulsifying, and adsorbent. The properties of chitin are non-toxic and easily degradable. It encourages the modification of chitin with the aim of optimizing the usefulness as well as expanding the field of chitin application. One of the derivatives of chitin is widely developed because of its wide application is chitosan. Chitosan is a polysaccharide resulting from de-acetylation of chitin. Due to its biodegradable and non-toxic properties, chitosan are recommended to be used in environmentally friendly industry [4,5].



As aforementioned, the research on the production of packaging materials or food coatings that is environmentally friendly called edible film was conducted. Thus, by utilizing the chitosan characteristics as emulsifier to be made into N-oleyl O-sulfate chitosan by reacting sulfate chitosan with methyl oleate to form nontoxic and easily degradable product[6]. The results were characterized by using Fourier Transform-Infra Red (FT-IR) spectroscopy, Water Vapor Transmission Rate (WVTR) test, Hydrophilic-Lipophilic Balance (HLB) Test, and toxicity test by Brine Shrimp Lethality Test) BSLT method[7].

## 2. Materials and Methods

### 2.1. Instruments

The instruments used in this research were three-neck flask, burette (50 mL  $\pm$  0.05 mL), analytical balance, rotary evaporator, chemical glass 250 mL, drop pipette, hot plate and magnetic stirrer, ball condenser, volume pipette, measuring flask 250 mL, glass funnel, separating funnel, dropping funnel, measuring glass 10 and 100 mL, laboratory spatula, pipe CaCl<sub>2</sub>, distilled water (*aquadest*) bottle, magnetic stirrer, stainless steel cylinder, thermometer, glass plate, desiccator, box, vial bottle, and infrared spectrophotometer.

### 2.2. Materials

The materials used in this research were Chitosan, alcohol 96%, sodium bicarbonate (pa), acetic acid (pa), oleic acid (pa), acetaldehyde (pa), sodium hydroxide (pellet), potassium hydroxide (pellet), anhydrous sodium sulfate, phenolphthalein, hydrochloric acid (pa), methanol, distilled water (*aquadest*), filter paper, toluene, oxalic acid (pa), H<sub>2</sub>SO<sub>4</sub> (pa), *n*-hexane, and shrimp larvae.

### 2.3. Procedures

**2.3.1. Synthesis of Chitosan Aldimine.** A total of 3.0057 grams of chitosan were dissolved in 150 mL of 1% acetic acid, inserted into a three-neck flask connected with a water-flushed condenser. After soluble, 2 mL of acetaldehyde was added and then refluxed at room temperature for 6 hours while dripping 3 mL of glacial acetic acid through a dropping funnel.

**2.3.2. Synthesis of O-Sulfate Chitosan.** The chitosan aldimine obtained from the previous stage was added with 0.1 M ammonium sulfate with a ratio of 2:5 ( $W_{\text{chitosan}}/V_{\text{ammonium sulfate}}$ ) and then put in shaker for 4 hours [8]. The compound was filtered with Whatman 42 filter paper, the precipitate was washed with distilled water (*aquadest*) until neutral and dried for 4 hours in an oven at 60 °C.

**2.3.3. Releasing Protective Group.** A total of 3 grams of O-sulfate chitosan aldimine was added with sodium bicarbonate, 1:1, with toluene as solvent and sodium methoxide as catalyst at 60-70 °C for 3 hours. The result was washed with distilled water (*aquadest*) and filtered. Last, the precipitate was dried at 55 °C.

**2.3.4. Synthesis of Methyl Oleate.** A total of 28.2 grams of oleate acid (p.a) were inserted into a flat bottom flask. Then, 14 mL of methanol and 50 ml of toluene (p.a) were added and stirred. Then slowly dripped 2 mL of H<sub>2</sub>SO<sub>4(c)</sub> while cooled at 0 °C and refluxed at 80 °C for 5 hours. Then, it was put in the rotary evaporation. The residue was extracted with 200 mL *n*-hexane (technical) and washed with distilled water (*aquadest*). The top layer was taken and anhydrous Na<sub>2</sub>SO<sub>4</sub> was added and allowed to stand for 30 minutes and filtered. The result of filtrate was put in rotary evaporation with temperature of 40-50 °C.

**2.3.5. Synthesis of N-Oleyle O-Sulfate Chitosan.** A total of 1 gram of sulfate chitosan was put into a three-neck flask. Then, 3 mL of methyl oleate was added and stirred at 60-70 °C  $\pm$  3 hours. It was

filtered. Then, the precipitate was dried at room temperature. The results obtained were analyzed by FT-IR spectrophotometer.

**2.3.6. Synthesis of Edible Film.** A total of 1 gram of N-oleyl O-sulfate chitosan was dissolved in 15 mL 1% acetic acid. It was stirred for 30 minutes at 40 °C. Then the mixture was poured into a glass plate whose sides are duct tape. The stainless steel cylinder was moved down to form a thin layer on the glass plate. It was dried at 25 °C for 24 hours.

### 2.3.7. Analysis of the Chemical Properties of N-Oleyl O-Sulfate Chitosan

**2.3.7.1 Determination of Hydrophilic-Lipophilic Balance (HLB) Value.** The analysis was done toward N-Oleyl O-Sulfate Chitosan. HLB was determined by using the formula as follow:

$$HLB = 20 \left( 1 - \frac{S}{A} \right) \quad (1)$$

Note: S=Saponification value

A=Acid number

**2.3.7.2 Determination of Water Vapor Transmission Rate (WVTR) Value.** The water vapor transmission rate of the film was measured by using gravimetric method, ASTM E96/E96M-10. The vapor absorbent material (silica gel) was placed in a vial bottle. Then the sample was placed in the mouth of the vial bottle covering the bottle. Later the end of the bottle was given glues so that no air enters.

The vial bottle was weighed with a precision of 0.0001 grams. It was placed in a closed container. It was given a small puddle of water. The bottle was weighed at the same hour (for 24 hours) and determined by the weight gain, the WVTR value is calculated by the formula:

$$\begin{aligned} WVTR &= \frac{\text{slope} \times 100 \times 100 \text{ m}^2}{\text{sample wide}} \\ &= \text{g} / \text{m}^2 / 24 \text{ hours } (RH25^\circ C) \end{aligned} \quad (2)$$


**2.3.7.3 Toxicity Test by BSLT Method.** Ten shrimp larvae in 100 µL of seawater were inserted into the test vial bottle, then 100 µL of sample solution was added. For each concentration, three repetitions are performed. The control was done with 100 µL blank solution then added seawater up to 100 µL. The observation was done after 24 hours by counting the number of alive and dead shrimp larvae, and then calculated its molarity like the following equation:

$$\% \text{ Mortality} = \frac{\text{Number of dead}}{\text{Number of dead} + \text{Number of alive}} \times 100\% \quad (3)$$

## 3. Results and Discussion

### 3.1. O-sulfate chitosan


Chitosan used in this research is chitosan for synthesis. The FT-IR spectra used to produce absorption peaks in the numbers: 3448.72 cm<sup>-1</sup>, 2924.09 cm<sup>-1</sup>, 2846.93 cm<sup>-1</sup>, 2337.72 cm<sup>-1</sup>, 1635.64 cm<sup>-1</sup>, 1427.32 cm<sup>-1</sup>, 1381.03 cm<sup>-1</sup>, 1319.31 cm<sup>-1</sup>, 1257.59 cm<sup>-1</sup>, 1080.14 cm<sup>-1</sup>, 894.97 cm<sup>-1</sup> (Figure 1).

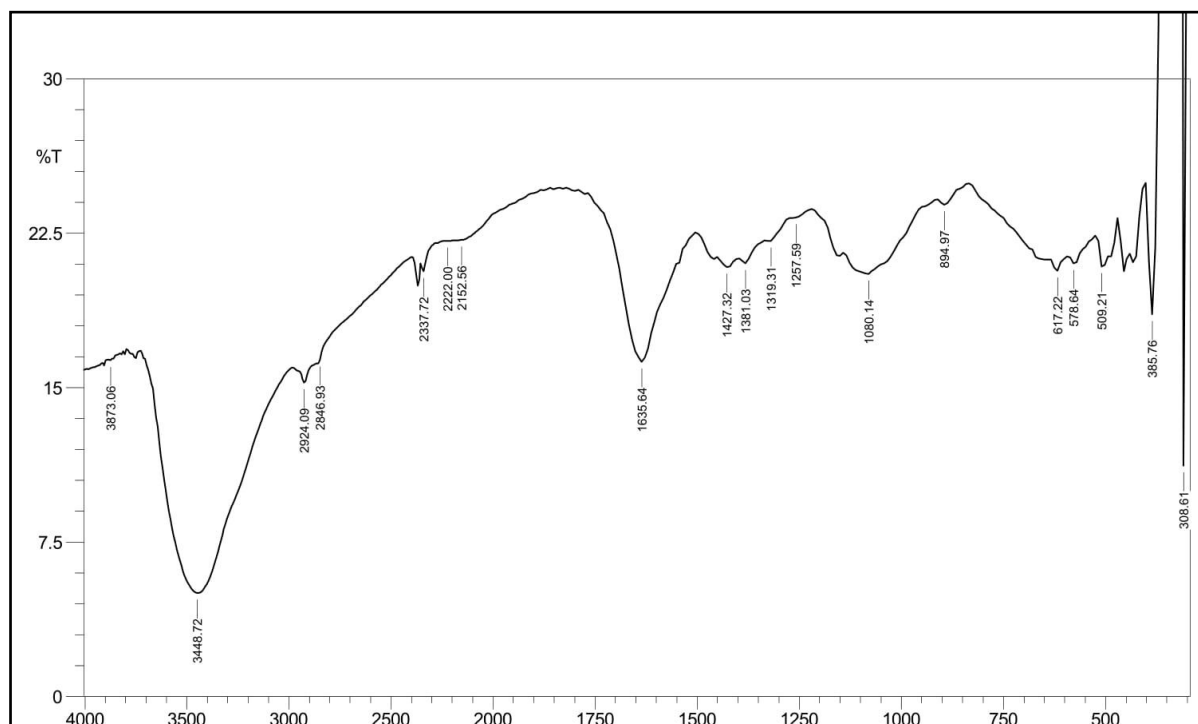

**Figure 1.** FT-IR spectra of chitosan

In this research, chitosan was first reacted with 1% acetic acid. The function of 1% acetic acid is as solvent for dissolving chitosan because chitosan is generally soluble in organic acids. One of them is acetic acid. A stirred situation was reacted with glacial acetic acid through a dropping funnel. The glacial acetic acid serves as a giver of acidic atmosphere in chitosan solution that was yellow. In a stirred state, an acetaldehyde solution was added to react with the chitosan solution.

In the preparation of chitosan sulfate, chitosan aldimine and ammonium sulfate served as a substitute that undergoes sulfonation reaction.  $\text{H-SO}_3^+$  from ammonium sulfate substituted the  $\text{CH}_2\text{O-H}$  bonds in the O-sulfate chitosan to form the O-Sulfate chitosan aldimine with the ammonium ( $\text{NH}_3$ ) and water ( $\text{H}_2\text{O}$ ) as the byproducts. Ammonium and water were filtered using filter paper. It was washed with distilled water (*aquades*) to neutralize the chitosan aldimine that had been formed [9]. The conversion of chitosan aldimine to O-sulfate chitosan aldimine was essentially an electrostatic binding of sulfate ions in the chitosan reactive group (carbonyl group). This conversion was done to increase the adsorption capacity of chitosan due to the presence of sulfate ions, then the carbonyl group in chitosan will be more cationic. In addition, the presence of sulfate groups was expected to also bind the cationic groups. Sulfate ions were used because of their electrons. The reactivity of the O- sulfate chitosan is more stable than the chitosan because the carbonyl group has undergone permanent protonation with the attachment of sulfate ion. Then the deprotection against Aldine groups was done to bind to the N group on chitosan by using sodium bicarbonate. Sodium bicarbonate was added to O-sulfate chitosan aldimine to release the protective group with toluene as its medium and sodium methoxide as a catalyst.

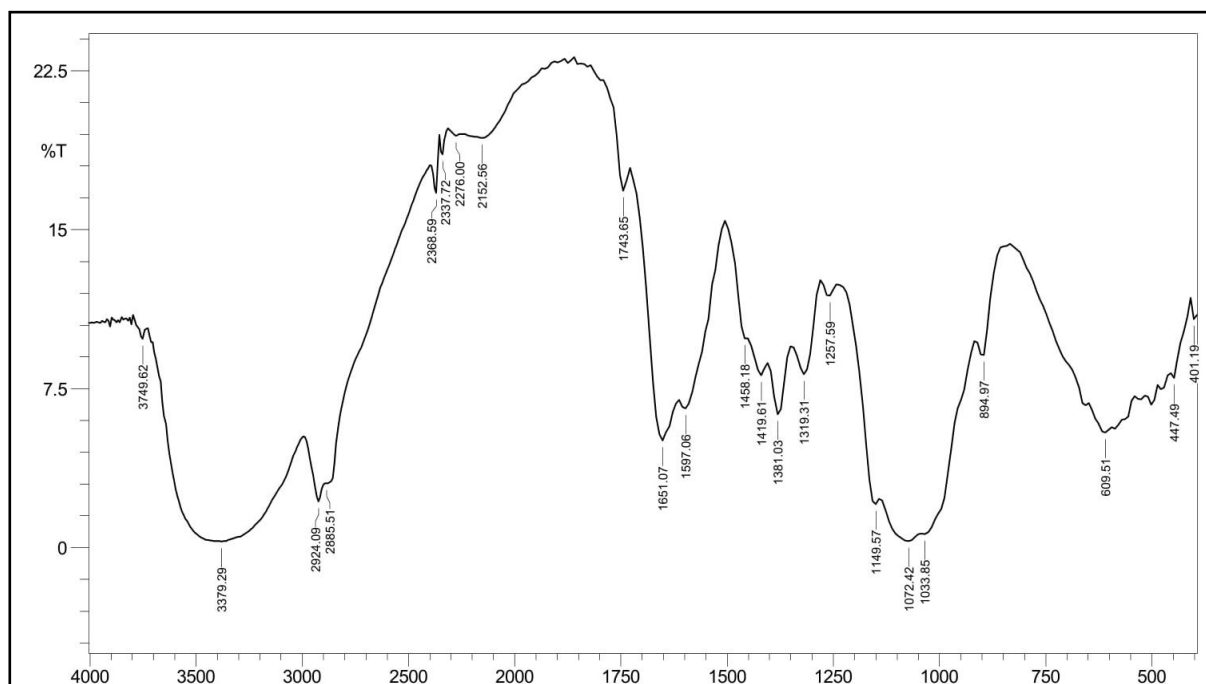


**Figure 2.** FT-IR spectra of O-sulfate chitosan

The FT-IR spectra of O-sulfate chitosan in figure 2 showed that the absorption peak in the wavenumber region  $3379.29\text{ cm}^{-1}$  is the vibration of the O-H group. A stretching vibration of C-H  $\text{sp}^3$  group was indicated on wavenumber  $2924.09\text{ cm}^{-1}$  and  $2885.51\text{ cm}^{-1}$ . It was supported by absorption peak at wavenumber  $1419.61\text{ cm}^{-1}$  that is a bending vibration of C-H from  $\text{CH}_2$  and spectrum  $1319.31\text{ cm}^{-1}$  that is a typical absorption of C-H for  $\text{CH}_3$ .

The absorption peak at wavenumber  $1651.07\text{ cm}^{-1}$  was a strain of the carbonyl group (C=O). It was also supported by the absorption peak at wavenumber  $1072.42\text{ cm}^{-1}$  which was the vibration of the S=O group. It was the typical peak of O-sulfate chitosan [10].

The FT-IR spectra (Figure 2) showed the deprotection of protective group through the absorption peak at the wavenumber region  $3379.29\text{ cm}^{-1}$  showing the overlapping vibration of O-H toward the N-H group of chitosan. The absorption peak in  $2924.09\text{ cm}^{-1}$  and  $2885.51\text{ cm}^{-1}$  showed the stretching vibration in C-H  $\text{sp}^3$  and the absorption peak at the wavenumber  $1597.06\text{ cm}^{-1}$  had weakened indicating deprecated imine.

### 3.2. Methyl oleate

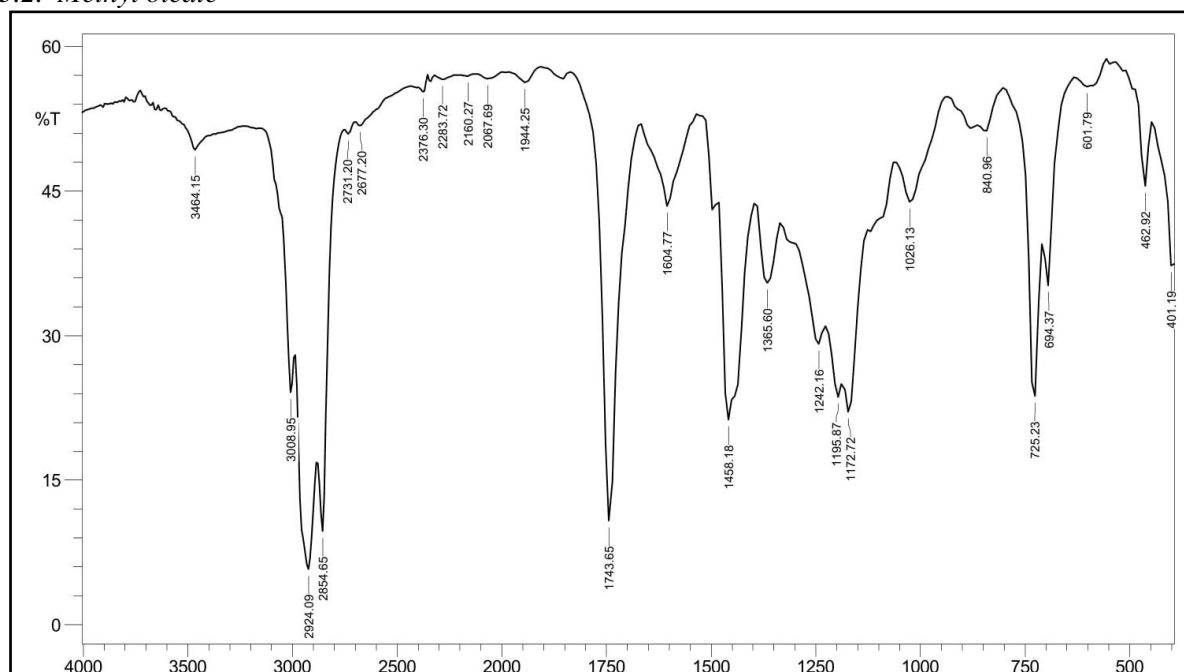


**Figure 3.** FT-IR spectra of methyl oleate

The FT-IR spectra in figure 3 showed the absorption peak at the wavenumber region  $2924.09\text{ cm}^{-1}$  and  $2854.65\text{ cm}^{-1}$ . According to Silvester, et al [10], it was the stretching vibration of  $\text{C-H sp}^3$  supported by the absorption of bending vibration  $\text{C-H sp}^3$  in wavenumber region  $1458.18\text{ cm}^{-1}$ . The absorption peak at the wavenumber  $1743.65\text{ cm}^{-1}$  was the absorption of the  $\text{C=O}$  carbonyl group of esters. It was formed and supported by the vibration of ester  $\text{C-O-C}$  in wavenumber region  $1172.72\text{ cm}^{-1}$ . The spectra showed the absorption peak at wavenumber region  $1604.77\text{ cm}^{-1}$  was the vibration of  $\text{C=C}$  alkene. Vibration absorption in wavenumber region  $725.23\text{ cm}^{-1}$  was the rocking vibration of  $(\text{CH}_2)_n$  at  $(\text{CH}_2)_{14}$ . In the FT-IR spectra of methyl oleate, the formed compound contained the  $\text{C=O}$  and  $\text{C-O-C}$  groups which were the characteristic of the ester. It did not contain the  $-\text{OH}$  group so that the compound was a methyl oleate compound.


### 3.3. N-oleyl chitosan O-sulfate

The FT-IR spectra in figure 4 showed the vibration peaks at wavenumber  $2926.01\text{ cm}^{-1}$  and  $2854.65\text{ cm}^{-1}$ . It was the stretching vibration of  $\text{sp}^3$  supported by the absorption of bending vibration of  $\text{C-H sp}^3$  at wavenumber  $1450.47\text{ cm}^{-1}$ . The absorption peaks at wavenumber  $1093.64\text{ cm}^{-1}$  and  $1020.34\text{ cm}^{-1}$  were the vibration of the  $\text{S=O}$  group which was the typical peak of O-sulfate chitosan. The absorption peak at the wavenumber  $1741.72\text{ cm}^{-1}$  was the absorption of the  $\text{C=O}$  carbonyl group of esters. It was formed and supported by the vibration of  $\text{C-O-C}$  ester in the wavenumber region  $1170.79\text{ cm}^{-1}$ . The spectra showed the absorption peak at wavenumber region  $1651.07\text{ cm}^{-1}$  was the vibration of  $\text{C=C}$  alkene. The absorption of stretching vibration at wavenumber region  $3008.95\text{ cm}^{-1}$  supported by the bending vibration peak at wavenumber  $725.23\text{ cm}^{-1}$  was the rocking vibration of  $(\text{CH}_2)_n$  at  $(\text{CH}_2)_{14}$ . The FT-IR spectrum of N-oleyl chitosan O-sulfate contained a  $(\text{CH}_2)_n$  group which was the characteristic of oleate. Thus, it can be concluded that the oleate in methyl oleate had entered and reacted with O-sulfate chitosan to form N-oleyl chitosan O-sulfate [10].



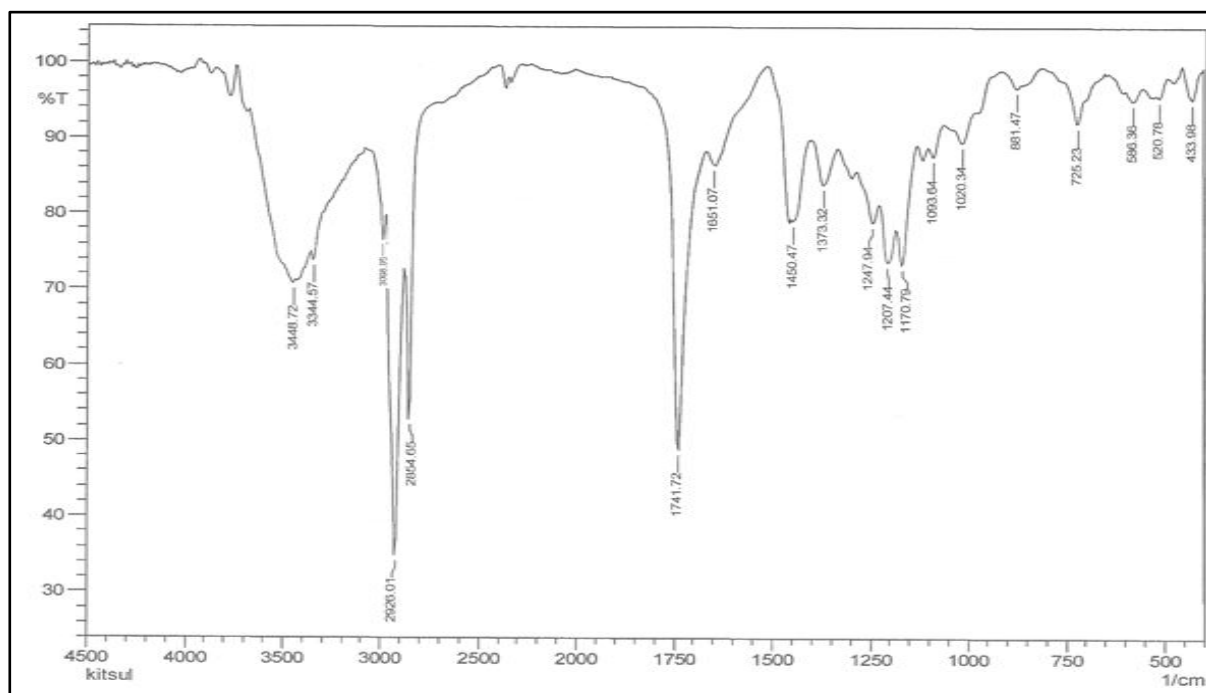

**Figure 4.** FT-IR spectra of N-oleyl chitosan O-sulfate

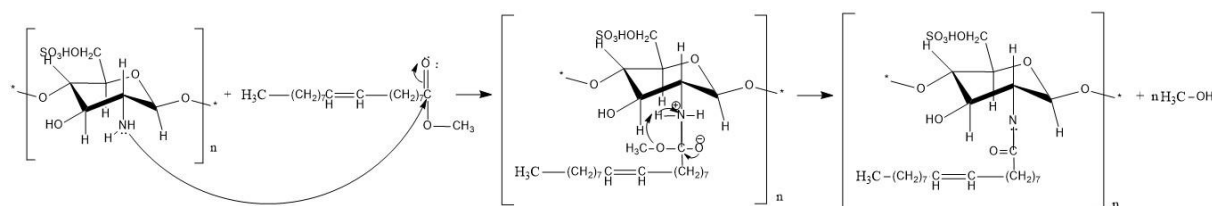

**Figure 5.** Mechanism reaction of N-oleylO-sulfate chitosan formation

### 3.4. Edible film

The produced edible film was transparent color, not rigid and elastic. Chitosan used as a base material gave transparent color to edible film. Then the oleate on the edible film provides elastic and non-rigid properties. The function of the use of oleate in the edible film was as plasticizer which was an organic material added to reduce the stiffness of the edible film. It had more flexible properties than the film without plasticizer.



**Figure 6.** Edible film



### 3.5. Hydrophilic-lipophilic balance (HLB) and saponification values

**Table 1.** Determination of acid number

Sample	Sample Mass (Gram)	Volume of Titration (mL)	Average volume of Titration (mL)	Acid number
N-oleyl O-sulfate chitosan	0.03	0.75	0.75	14.02
	0.03	0.75		
	0.03	0.75		

**Table 2.** Determination of saponification value

Sample	Sample Mass(Gram)	Volume of Titration (mL)	Average volume of Titration (mL)	Saponification value
Blank		20.75	20.75	
		20.75		
		20.75		
N-oleyl O-sulfate chitosan	0.03	19.50	19.75	18.7

The HLB test gave the data of acid number and the saponification value from N-oleylO-sulfate chitosan. The acid number was 14.02 and the saponification number was 18.7. Thus, HLB value obtained from N-oleyl O-sulfate chitosan was 6.68.

The HLB value of N-oleylO-sulfate chitosan was 6.68. If it was viewed by a scale showing the surfactant function of the HLB value was at position 4-7 indicating that the compound can be used as a W/O emulsion.

### 3.6. Water vaportransmission rate(WVTR) test

**Table 3.**Determination of water vapor transmission rate

Sample of Film	Silica gel Mass + Vial bottle (gram)			Time used (hour)	Sample area (m <sup>2</sup> )
	G1	G2	G		
Chitosan	11.7426	12.3948	0.6522	24	16.00
N-Oleyl O-Sulfate Chitosan	9.2521	9.5739	0.3218	24	16.00

The WVTR was used to determine the permeability value of a material toward water vapor. Water vapor permeability is a measure of a material as it can be passed by water vapor.

$$WVTR = \frac{24 \times 10}{A} \times \frac{W}{t} (\text{gram}/\text{m}^2/24 \text{ hours})$$

Water vapor movement in a food product can occur when the difference of water activity (*aw*) happen. The difference of the humidity of the food product with its surrounding environment can be controlled by regulating the *aw* on the food, or by wrapping it with an edible film layer which had good barrier properties against the water vapor transmission and can avoid the loss of water vapor effectively. Water vapor transmission was strongly influenced by the temperature, thickness, type and the concentration of the plasticizer and the nature of the material to form edible film.

The data showed that the permeability of water vapor from the chitosan film was relatively high if it was compared to N-oleyl O-sulfate chitosan film. It was because of the hydrophilic properties

possessed by the chitosan. The chitosan polymer of it had a large hydrogen bond so that the water vapor permeability value was high. However, the chemical polymer component of N-oleyl O-sulfate chitosan had non-polar lipid that had lower water vapor permeability that made the film can retain the water.

### 3.7. Toxicity test by BSLT (Brine Shrimp Lethality Test)

The observation of bioactivity potential was done based on lethal concentration 50% ( $LC_{50}$ ) value. It was a value that showed the concentration of toxic substances that can cause the death of organisms up to 50%. Chemical compounds belonged to potentially active or toxic when having  $LC_{50}$  less than 1000 ppm, otherwise, it is not toxic if it has  $LC_{50}$  value more than 1000 ppm.

Based on the molarity test, by using SAS Probit Analysis, of shrimp larvae from N-oleyl O-sulfate chitosan, the  $LC_{50}$  value was 3738.4732 ppm. The value indicates that N-oleyl O-sulfate chitosan is non-toxic. It happened because the sulfate used in the synthesis of N-oleyl O-sulfate chitosan was not a concentrated sulfuric acid, but ammonium sulfate which tends to be lower level of toxicity, in addition of the ammonium sulfate used had a low concentration of 0.1 M.

## 4. Conclusions

Based on the results, it can be concluded that N-oleylO-sulfate chitosan can be synthesized by sulfonation reaction in chitosan and ammonium sulfate and followed by amidation reaction using methyl oleate. N-oleyl O-sulfate chitosan can reduce the rate of water vapor transmission in producing edible film through Water Vapor Transmission Rate (WVTR) analysis. In addition, N-oleyl O-sulfate chitosan can be used safely in producing edible film. It can be seen through the toxicity test by BSLT Method that shows that the value of  $LC_{50}$  was 3738.4732 ppm.

## Acknowledgments

Thanks are extended to the Ministry of Research, Technology, and Higher Education Indonesia for funding this research. Authors would like also to thank to Head of Laboratory of Organic Chemistry, Faculty of Mathematics and Natural Sciences, Mulawarman University, for facility that had been given to authors.

## References

- [1] Joseph C S, Prashanth K V H, Rastogi N H *et al* 2011 Optimum Blend of Chitosan and Poly-( $\epsilon$ -caprolactone) for Fabrication of Films for Food Packaging Application *Journal of Food Bioprocess Technology* **4**(7) pp 1179-85
- [2] Sanford P A and Hutchings G P 1987 *Chitosan-A Natural, Cationic Biopolymer: Commercial Applications in Industrial Polysaccharides: Genetic Engineering, Structure/Property and Applications*, ed Yalpani M (Amsterdam: Elsevier Science Publisher) p 363
- [3] Susanto T and Sucipta N 1994 *Teknologi Pengemasan Bahan Makanan* (Blitar: CV Family)
- [4] Purnamasari A P 2013 *Modifikasi Kitosan Sulfat Sebagai Katalis Heterogen Pada Produksi Biodiesel dari Minyak Kelapa Sawit* (Departement of Chemistry, Faculty of Science and Technology, Airlangga University, Surabaya) Thesis
- [5] Supeni G and Irawan S 2012 *Pengaruh Penggunaan Kitosan Terhadap Sifat Barrier Edible Film Tapioka Termodifikasi* (Jakarta: Balai Besar Kimia dan Kemasan)
- [6] Vieville C, Moulooungui Z and Gaset A 1993 Etherification of Oleic Acid by Methanol Catalyzed by P-Toluenesulfonic Acid and The Cation-exchange Resin K2411 and K1481 I Supercritical Carbondioxide *Industrial Engineering Chemical Research* **32** pp 2065-68
- [7] Saputro A N C and Mahardiani L 2011 Sintesis Senyawa Turunan Kitosan, Chitosan Modified Carboxymethyl (Cs-Mcm) dan Aplikasinya Sebagai Agen Perbaikan Mutu Kertas Daur Ulang *Jurnal EKOSAINS* **III**(1) pp 47-53
- [8] Mahatmanti FW 2001 *Studi Adsorpsi Ion Logam Seng (II) dan Timbal (II) pada Kitosan dan Kitosan-Sulfat Dari Cangkang Udang Windu (Peanus monodon)* (UGM, Yogyakarta) Thesis

- [9] Usman M R M, Jain B U, Pawar S R, Shaikh T Y, Potda M B, Pati G H 2013 Many Potential Application of Chitosan as a Pharmaceutical Excipient, Int, *J.A.P.S BMS2*(1) pp 16-20
- [10] Silverstein R M, Bassler G C and Morrill T C 1991 *Spectrometric Identification of Organic Compounds 4<sup>th</sup> Ed* (New York: John Willey & Son Inc)